





Kick-down, pilot operated, balanced piston relief valve

Capacity:
12 gpm (45 L/min.)

Model:
ROCB

Product Description

Kick-down relief cartridges act similar to a circuit breaker in an electrical system. The valves will kick completely open and remain open once the pressure at the inlet (port 1) exceeds the valve setting, creating an unrestricted flow path from port 1 to tank (port 2). The valve remains open as long as the pressure at port 1 exceeds the pressure at port 2. To reset the valve, flow from port 1 to port 2 must cease and pressure at port 2 must be equal to or greater than the pressure at port 1.

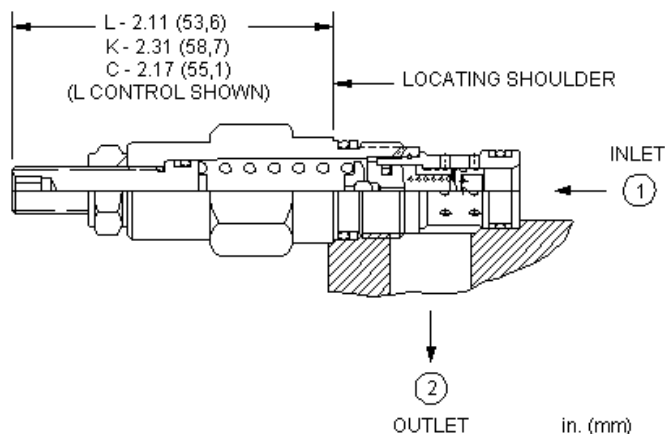

Technical Features

- To reset valve, flow through the cartridge must cease.
- Main stage orifice is protected by a 150 micron stainless steel screen.
- Not suitable for use in load holding applications.
- Intended for use on the actuator side of the system as flow through the valve must cease for the valve to reset. If used on the pump side of a system, pump flow must be shut off for the valve to reset.
- Back pressure on the tank port (port 2) is directly additive to the valve setting at a 1:1 ratio.
- All 2-port relief cartridges (except pilot reliefs) are physically and functionally interchangeable (same flow path, same cavity for a given frame size).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.


Special Notes

- Do not use in load holding applications.

Technical Data

	U.S. Units	Metric Units
Cavity	T-162A	
Capacity	12 gpm	45 L/min.
Factory Pressure Settings Established at	Kick down point	
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	2 in ³ /min. @1000 psi	30 cc/min. @70 bar
Response Time - Typical	25 ms	

Series (from Cavity)	Series 0	
Adjustment - Number of Clockwise Turns to Increase Setting	5	
Valve Hex Size	3/4 in.	19,1 mm
Valve Installation Torque	20 - 25 lbf ft	27 - 33 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm
Seal Kits - Cartridge	Buna: 990-162-007	
Seal Kits - Cartridge	Viton: 990-162-006	
Model Weight	0.21 lb.	0.10 kg.

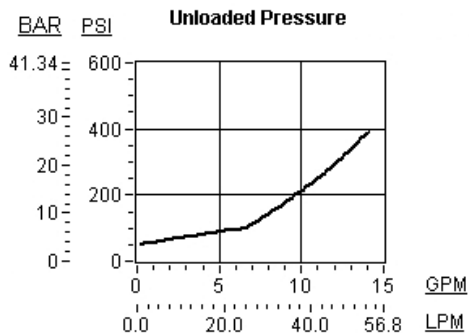

RQCB-LAN

Control	Adjustment Range	Seal Material
Standard Options	Standard Options	Standard Options
C* Tamper Resistant - Factory Set	A 75 - 3000 psi (5 - 210 bar), 1000 psi (70 bar) Standard Setting	N Buna-N V Viton
K Handknob	B 75 - 1500 psi (5 - 105 bar), 1000 psi (70 bar) Standard Setting	
L Standard Screw Adjustment	C 75 - 6000 psi (5 - 420 bar), 1000 psi (70 bar) Standard Setting	
	N 75 - 800 psi (5 - 55 bar), 400 psi (28 bar) Standard Setting	
	Q 75 - 400 psi (5 - 28 bar), 200 psi (14 bar) Standard Setting	
	W 75 - 4500 psi (5 - 315 bar), 1000 psi (70 bar) Standard Setting	

* Special Setting required, specify at time of order
Customer specified setting stamped on hex.